



COMPACT SOLAR SURVEILLANCE TRAILER

Caprock's innovative solution for smaller to medium-sized jobs seeking expanded coverage without access to additional 120v power sources. The solar surveillance trailer is a compact, mobile solar platform that integrates out cutting-edge pole camera technology, providing comprehensive surveillance where traditional power options are limited. Designed with an industrial-grade trailer for effortless placement, this solution offers unparalleled convenience and functionality.



LIVE MONITORING

Live, 24/7, US based, monitoring services available. Alerts sent to you and/or your local law enforcement of suspicious activities.



REMOTE SITE MANAGEMENT

View your site live, 24/7, from any location, on any device.



MOBILE

Designed for effortless mobility, this compact trailer moves easily between locations without the need for specialized transport or setup.



PTZ CAMERAS

Pant, tilt, and zoom cameras allow for remote camera repositioning when cameras need to be relocated.



TALK DOWN SPEAKER


Communicate directly through our mobile app, while our monitoring station can also use them to deter intruders in real-time

SPECIFICATIONS

- 20' mast height
- 800W solar array
- 1,200 Ah of AGM batteries
- Cellular 4G, 5G & Starlink Router
- Talk down speaker
- Forklift accessible
- Lockable control housing
- Backup 120V AC battery charger

PTZ CAMERA SPECIFICATION

- 2 x 2-megapixel
- 25 x Optical Zoom
- 16 x Digital Zoom
- Up to 475' IR distance
- NDAA Compliant

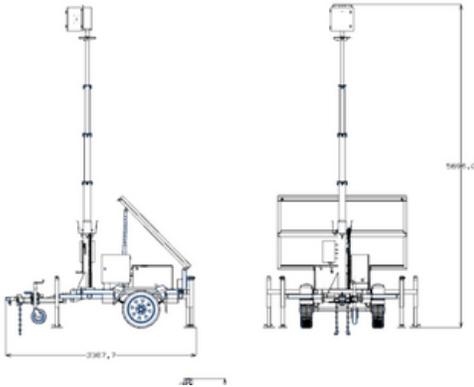

STOWED DIMENSIONS:

- Length: 92"
- Width: 89"
- Height: 99"
- Weight: 1,750 lbs.

DEPLOYED DIMENSIONS:

- Length: 92"
- Width: 89"
- Height: 224"
- Weight: 1,750 lbs.



AVC-PNN41X25LW

NDAA COMPLIANT | CE | FCC

4MP NETWORK IR SPEED DOME CAMERA

OVERVIEW

- High Efficiency Video Coding (H.265)
- 1/2.7" 4MP Progressive Scan CMOS
- Up to 2560 x 1440 @30fps Resolution
- Min. illumination: Color: 0.01 Lux@ (F1 .65, AGC ON)/
- B/W: 0.002 Lux@ (F1 .65, AGC ON)/ 0 Lux with IR
- 25x Optical Zoom
- WDR, HLC, BLC, 3D DNR, Defog
- Up to 150m smart IR distance
- PoE (802.3 at class 4)
- IP66
- Support H.265+/H.265 Video Compression
- Superior Image Quality
- Working Environment and Interoperability
- NDAA Compliant
- Includes wall mount (AVM-PT-WMT-N20)
- Built-in micro SD card slot with video and still image capture function (up to 256GB)

DIMENSIONS

Unit : inch(mm)

