



# POLE CAMERA 3-CAMERA

This versatile all-in-one unit delivers exceptional coverage within a sleek, compact enclosure designed for versatile mounting options. Employ a pole camera to actively monitor and deter potential intruders or safeguard against unauthorized removal of tools, equipment, or materials by employees at any site.

A pivotal addition to your temporary surveillance setup, pole cameras are available in various camera configurations, ensuring precise and comprehensive site coverage. Each unit can easily be powered via a standard 120v supply or can be conveniently configured to run off solar energy.



## REMOTE SITE MANAGEMENT

View your site live, 24/7, from any location, on any device.



## TALK DOWN SPEAKER

Communicate directly through a mobile app, while our monitoring station can also use them to deter intruders in real-time



## LIVE VIDEO MONITORING

Live, 24/7, US based, monitoring services available. Alerts sent to you and/or your local law enforcement of suspicious activities.



## STORED FOOTAGE

Each camera saves up to 14 days of rolling footage to conveniently access events that are not caught right away.



## PTZ CAMERAS

Pant, tilt, and zoom cameras allow for remote camera repositioning when cameras need to be relocated.

## SPECIFICATIONS


- 120V Power Supply
- Cellular 4G LTE router
- Optional solar charge
- Mounting bracket: 3/8" holes or 1/2" strap
- Optional talk down speaker
- Onboard redundant hard drive
- Lockable control housing
- Voltage regulator
- Loss of power alarm: 5 Ah
- 1 x Nanoflar Strobe

## PTZ CAMERA SPECIFICATION

- 2 x 2-megapixel
- 25 x Optical Zoom
- 16 x Digital Zoom
- Up to 475' IR distance
- NDAA Compliant

## ADDITIONAL CAMERA CONFIGURATIONS

- 5-megapixel 2592 x 1944 (Fixed)
- 8-megapixel 3840 x 2160 (Fisheye)
- Consultation available for cusotm options

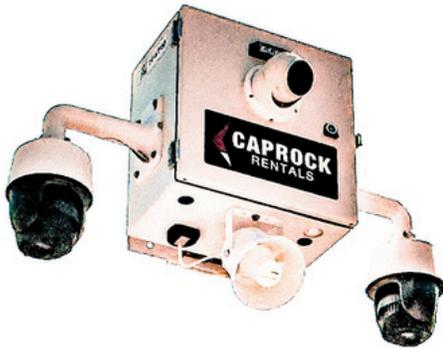

**DIMENSIONS:**

- Length: 40"
- Width: 17"
- Height: 10"
- Weight: 32 lbs.



**AVC-PNN41X25LW**

NDAA COMPLIANT | CE | FC

4MP NETWORK IR SPEED DOME CAMERA

**OVERVIEW**

- High Efficiency Video Coding (H.265)
- 1/2.7" 4MP Progressive Scan CMOS
- Up to 2560 x 1440 @30fps Resolution
- Min. illumination: Color: 0.01 Lux@ (F1 .65, AGC ON)/
- B/W: 0.002 Lux@ (F1 .65, AGC ON)/ 0 Lux with IR
- 25x Optical Zoom
- WDR, HLC, BLC, 3D DNR, Defog
- Up to 150m smart IR distance
- PoE (802.3 at class 4)
- IP66
- Support H.265+/H.265 Video Compression
- Superior Image Quality
- Working Environment and Interoperability
- NDAA Compliant
- Includes wall mount (AVM-PT-WMT-N20)
- Built-in micro SD card slot with video and still image capture function (up to 256GB)

**DIMENSIONS**

Unit : inch(mm)

